



Mortise lock, for hinged doors, Startec, grade 3, profile cylinder

for fire resistant/smoke control doors, Forend: 24 mm, square, satin stainless steel

Art. no. 911.02.165

Article details

Type of locking	PC
Distance	85.00 mm
Forend	Flat forend edged
Forend width	24.00 mm
Door construction	Unrebated
Lever follower	8.00 mm
Mounting	DIN left/right (reversible)
Material	Forend, latchbolt and deadbolt: Stainless steel Lock case: Steel Deadbolt pocket: Plastic
Latchbolt version	Standard latch
For door type	Hinged doors Fire resistant and smoke control doors
Version	Strike plate with bolt pocket
Colour/finish	Matt
Forend length	240.00 mm
Deadbolt version	Standard deadbolt

Standard

Certified in compliance with EN 12209: 2003

Classification in compliance with EN 12209 3|X|8|1|0|G|3|B|C|2|0

Supplied with

- 1 mortise lock
- 1 flanged striking plate
- 2 deadbolt pockets






Technical data attributes

Technical data

Type of locking	PC
Distance	85 mm
Deadbolt throw	2 turns
Deadbolt throw dim.	20 mm
Lever follower	8 mm

Installation drawings

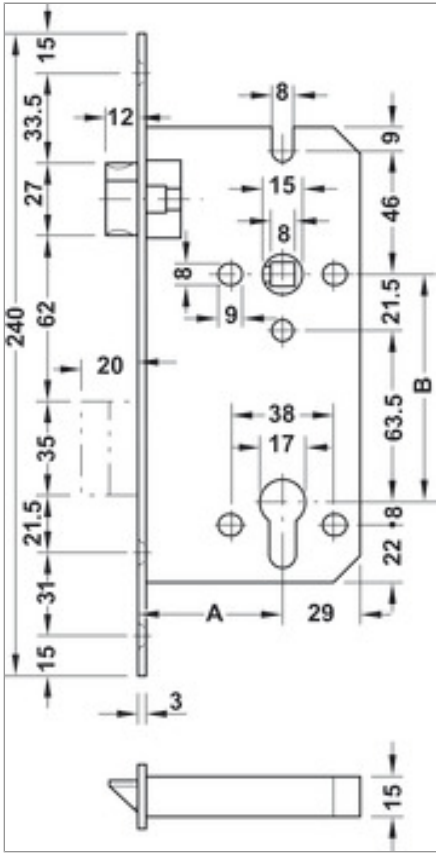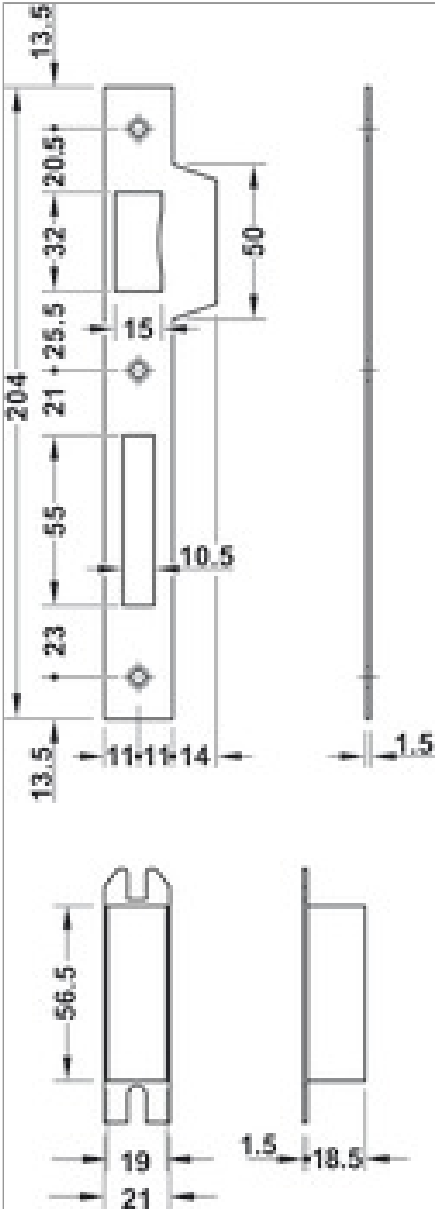

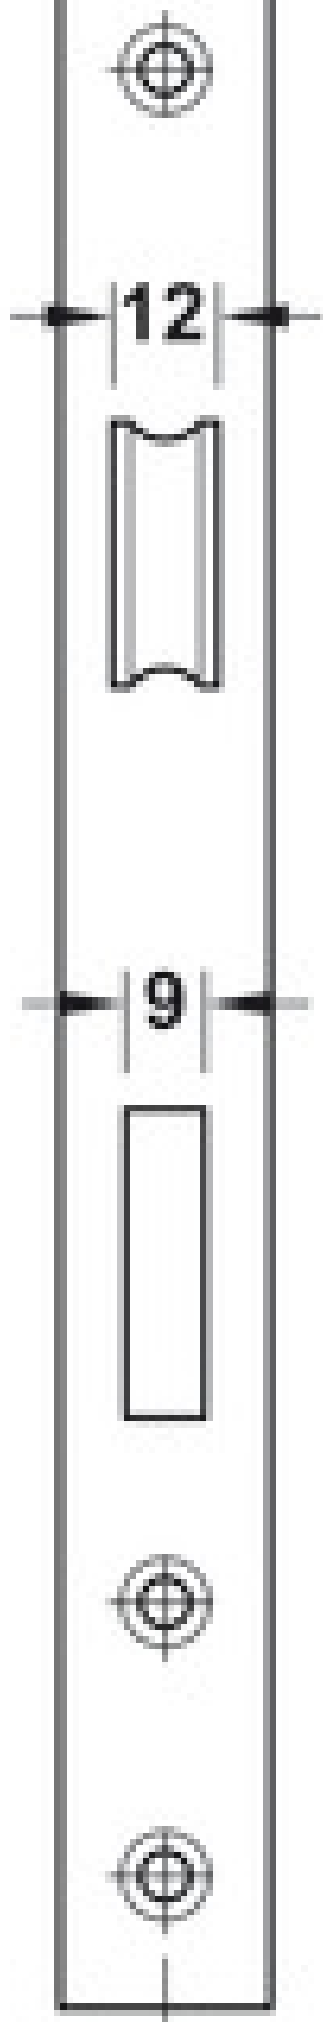

$$\leftarrow 12 \cdot 12 \rightarrow$$