

## Retractable door seal, with smoke control and fire resistance

### Product details

**Area of application**

For soundproof doors in compliance with  
EN ISO 10140-1 / 10140-2 / 717-1  
for smoke control doors in compliance  
with EN 1634-3  
for fire resistant doors in compliance  
with EN 1634-1 / BS 476

**Material**

Carrier: Aluminium  
Sealing profile: Silicone

**Release**

single-side

**Installation dim.**

Groove: 13 x 30 mm

**Mounting**

For DIN left and DIN right hand use

**Fire resistance duration**

60.0 min

**Colour/finish**

Sealing profile: Grey, Carrier: Bright

**Product type**

Retractable door seal

**Mounting**

For DIN left and DIN right hand use

**Colour sealing profile**

Grey

**Material sealing profile**

Silicone

**Material carrier**

Aluminium

**Version**

Single-side release, 1,330 mm and  
1,430 mm with double-side release

**Finish**


Carrier: Bright

|                        |   |
|------------------------|---|
| Protective suitability | for smoke control doors in compliance with EN 1634-3 for sound absorbing doors in compliance with EN ISO 10140-1 / 10140-2 / 717-1 For fire resistant doors in compliance with EN 1634-1 / BS 476 |
| Sound proofing value   | 50 dB   |
| Colour                 | Sealing profile: Grey   |
| Sealing height max.    | 20.0 mm   |
| Installation           | For full mortice fitting with fixing brackets (also fixed lengths) lengths from 708 mm can be shortened (also fixed lengths)  |
| Length trimming        | 150 mm  |

#### Supplied with

- 1 retractable door seal
- 2 mounting brackets with screws
- 1 release plates with screws

#### Installation drawings

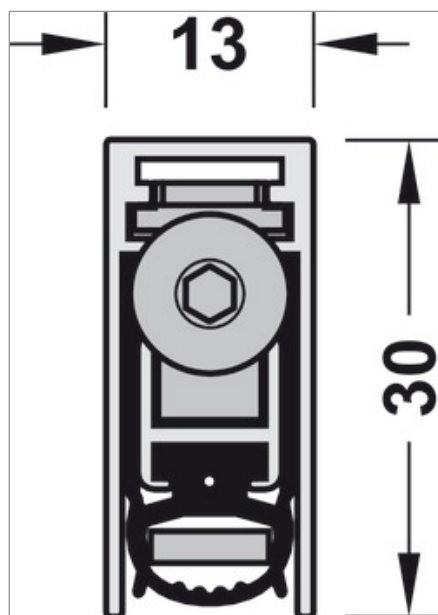

Article table (6)

|  |                        |
|--|------------------------|
|  | Art. no.<br>950.40.011 |
|  | Art. no.<br>950.40.013 |
|  | Art. no.<br>950.40.014 |
|  | Art. no.<br>950.40.015 |
|  | Art. no.<br>950.40.016 |
|  | Art. no.<br>950.40.017 |