



**Push catch, for drilling in, 10 mm or for screw fixing into 32/37 series drilled holes**

## Product details

- Door gap continuously adjustable

child-safe: push rod secured against unscrewing



Installation

Area of application	For front panels without handles
Product Material	Plastic
Adjustment facility	Depth adjustment: $\pm 2$ mm, door gap continuously adjustable
Release distance	2–3.7 mm
Pull	6.0 N
For drill hole Ø	10.0 mm

## Order reference

Please order counterplate separately.

## Installation drawings

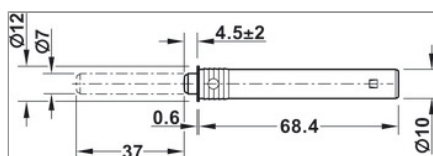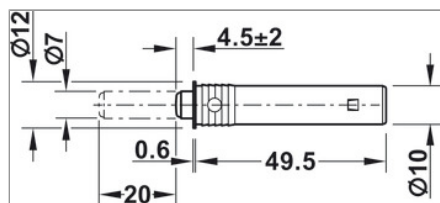

## Article table (5)

Lift 20 mm, grey, with rubber buffer	Art. no. 356.04.620
Lift 37 mm, grey, with rubber buffer	Art. no. 356.04.621
Lift 20 mm, grey, with magnet	Art. no. 356.04.630
Lift 37 mm, grey, with magnet	Art. no. 356.04.631
Lift 37 mm, white, with magnet	Art. no. 356.04.635